

Service you wheels, brakes and struts quickly and efficiently

Strut Service Tool - No more removing wheels to exercise struts

Standard Features:

- Safe and efficient
- 1,500 lb (680 kg) capacity
- Safely exercise aircraft landing gear struts to expel air while servicing them with oil
- Reduces the possibility of damage to the aircraft pneumatic lifting operation
- Boom Lift Range: 6.5 to 52 in (15.9 to 132 cm)
- Low profile to fit under most aircraft wings
- Preferred over other methods of strut servicing
- Standard adapter fits most aircraft including Falcons, Challengers & Learjets
- Finish: Durable Powder Coat Tronair Blue




14-6906-0110

Adapter Kits:

- K-4126** - Includes kits K-4127, K-4128, K-4129 and K-4130
- K-4127** - Axle Adapter Assembly (3.340 diameter) for Gulfstream GII, GIII, GIV, GIVSP, G400
- K-4128** - Axle Adapter Assembly (3.536 diameter) for Gulfstream GII, GIII, GIV, GIVSP, G400
- K-4129** - Axle Adapter Assembly (3.610 diameter) for Gulfstream GV, GVSP, G350, G450, G500, G550
- K-4130** - Axle Adapter Assembly (3.840 diameter) for Gulfstream GV, GVSP, G350, G450, G500, G550

NOTE: Aircraft adapters will vary depending on Gulfstream aircraft model and aircraft service change 155

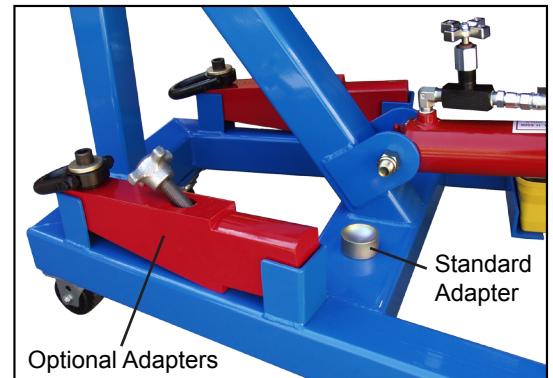

Universal Tool - Strut, Break and Tire

One tool to service struts, brakes and tires

Standard Features:

- Low profile
- Relief valve to prevent lifting aircraft
- No need to remove tire when servicing struts
- Fits 14" to 30" tire
- 800 lb (362.9 kg) lifting capacity
- Lift range: Collapsed - 4.75 in (12 cm), Fully extended - 21 in (53.34 cm)
- Long handle for ease of lifting
- Wide, heavy duty steel turntable for both nose and main tires
- Easy clamp to lock tire in place
- 2 swivel casters for easy maneuverability
- No mark rubber wheels
- Finish: Powder Coat Tronair Blue



Specifications:

Model Number	Length in (cm)	Width in (cm)	Height in (cm)	Weight lb (kg)
14-6906-0110	77.25 (196.2)	45.3 (115.1)	33.75 (85.7)	325 (147)
14-6919-0110	81(205.8)	50 (127)	33.75 (85.7)	325 (147)
14-6911-0100	29 (74)	15 (38)	7 (18)	98 (44.5)
14-6915-0100	29 (74)	22 (56)	7 (18)	98 (44.5)

Wheel and Brake Dolly - *What once took two men, now takes one*

Standard Features:

- Accommodates tire sizes from 24 to 54 in (61 to 137 cm)
- Sturdy welded steel construction
- Manually operated hydraulic hand pump
- 7 in (18 cm) maximum lift height
- Adjustable rear swivel caster for tilting the dolly
- Front swivel casters with floor locks
- Padded brake handling adapter
- 84 in (213 cm) strap assembly for securing load to dolly
- 700 lb (318 kg) maximum load capacity
- Finish: Powder Coat Tronair Blue



14-6883-0110

Wheel Dolly - *Transport Wheels With Ease*

Standard Features:

- Heavy duty 8 in (20 cm) casters
- Sturdy welded steel construction
- Manually operated with hand crank
- 5" diameter swivel casters for greater maneuverability in all directions
- 12" corrosion resistant steel rollers with ball bearings
- Distance between rollers:
Minimum: 10 in (25.4 cm)
Maximum: 24 in (60.96 cm)
- Universal applications
- 350 lb (159 kg) maximum load capacity
- Finish: Powder Coat Tronair Blue



14-6909C0000
(wheel not included)

Specifications:

Model Number	Length in (cm)	Width in (cm)	Height in (cm)	Weight lb (kg)
14-6883-0110	33 (84)	52 (132)	(32 (81))	297 (135)
14-6909C0000	40 (101.6)	21.5 (54.6)	40 (101.6)	52 (23.6)

www.tronair.com

Tronair • Email: sales@tronair.com • Phone: 419-866-6301 or 800-426-6301 • Fax: 419-867-0634

Asia/Australia - Email: tronairasia@tronair.com • Phone: 662 2121463 • Fax: 662 2121332

Europe, Middle East & Africa Sales Office • Email: saleseurope@tronair.com • Phone: 44-0-113-245-3300 • Fax: 44-0-113-322-0436

TR021915