

Revolutionizing how you move Regional Aircraft! **faster - safer - more cost efficient**



Standard Features:

- Connect to the aircraft nose landing gear without leaving the cockpit
- All contact is made only on the aircraft tires
- No contact or straps on the oleo strut or nose landing gear
- Designed to fit most common dual nose-wheel regional aircraft
- Two - 8 Hp continuous duty drive motors coupled directly to brake/torque hub results in fewer moving parts
- Proportional drive with steering position sensor
- Fully automated, multi-tap battery charger
- 16 - 6 volt batteries
- Rear suspension
- Power steering
- Heavy duty long life torque hubs
- Regenerative dynamic motor braking for long battery life
- Redundant hydraulic service foot brake
- Automatic parking brake
- Solid rubber tires

Standard features continued on back


OEM Approved

**SOFTCAPTURE® aircraft on tires without straps
and without touching the oleo strut!**

Model shown has a 75,000 towing capacity

Safety Features:

- Throttle speed limit safety switch reduces JETporter speed when approaching the aircraft
- Forward motion safety switch disengages the throttle when the forward motion safety bar contacts the aircraft nose tire. This prevents the operator from pushing on the nose tire
- The gate lock and cradle locator safety switch locates the cradle and stops the "cradle down" movement when the cradle is lowered to the ground. The gate lock prevents "cradle open" movement when the cradle is up
- The parking brake release safety switch allows the JETporter to "roll" during capture so the aircraft doesn't move. The hydraulic foot brake remains functional at all times
- Controlled acceleration and deceleration joystick operated throttle

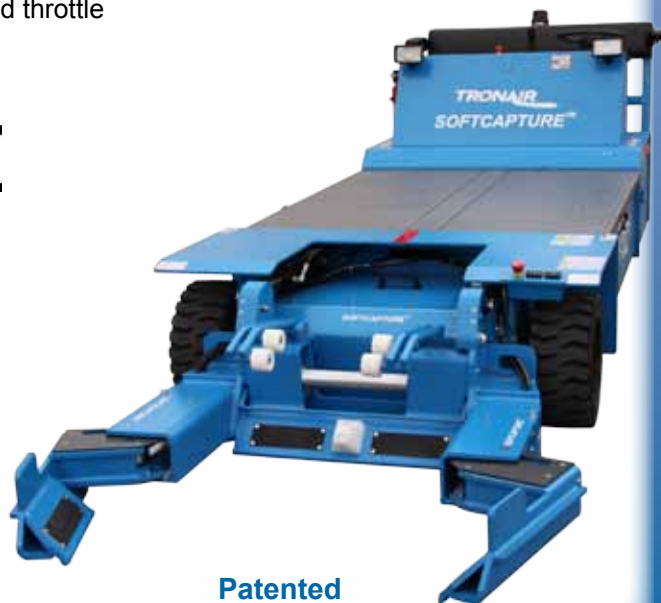



Standard Features: *continued*

- Battery charge indicator with hourmeter
- Emergency stop
- 10 micron hydraulic system filtration
- Covered storage compartments with rubberized coating on aluminum diamond deck cover
- Fire extinguisher
- Headlights and rear facing lights
- Strobe light and side marker lights
- Horn
- Finish: Durable Powder Coat Tronair Blue

Optional Equipment:

- Cockpit cover
- Pintle hitch (rear)
- Battery watering system
- Custom colors and graphics

Specifications:

Model Number	Max Aircraft Weight lb (kg)	Cradle Capacity lb (kg)	Speed Empty mph (kph)	Speed Full Load mph (kph)	Length in (cm)	Width in (cm)	Height in (cm)	Weight lb (kg)
JP75SC	75,000 (34,019)	7,500 (3,402)	8 (12.9)	3 (4.8)	179.5 (455.9)	58 (197.3)	52 (132.1)	5,700 (2,586)

www.tronair.com

Tronair • Email: sales@tronair.com • Phone: 419-866-6301 or 800-426-6301 • Fax: 419-867-0634

Asia Sales Offices: China - Email: tronairchina@tronair.com • Phone: 86-592-5560735 • Fax: 86-592-5563132

Asia/Australia - Email: tronairasia@tronair.com • Phone: 66-2665-6511 • Fax: 66-2204-1858

Europe, Middle East & Africa Sales Office • Email: saleseurope@tronair.com • Phone: 44-0-113-245-3300 • Fax: 44-0-113-322-0436

TR030811